



- 450mm Wide Aluminium RIDGE CAP.
- Long span Aluminium ROOFING SHEETS.
- 75mm x 50mm Treated HWD Timber PURLINS @ 900mm c/c.
- 150mm x 75mm Treated HWD Timber RAFTERS @ 1200mm c/c.
- 150mm x 75mm Treated HWD Timber TIE-BEAMS @ 1200mm c/c.
- 100mm x 50mm Treated HWD Timber Vertical/ Diagonal STRUTS.

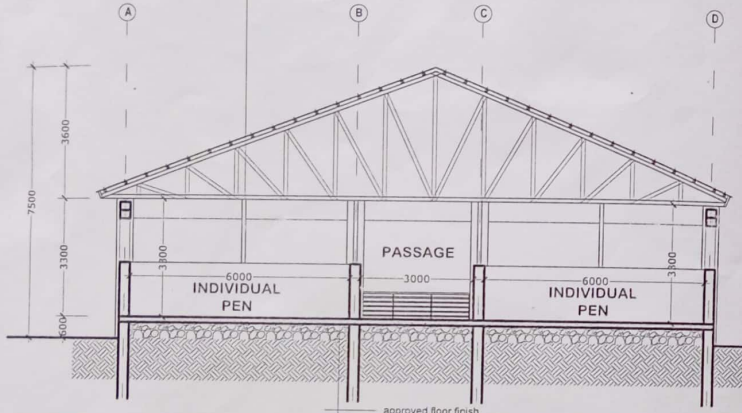


SECTION A-A

- approved floor finish
- 150mm thick concrete floor slab
- 450mm thick hardcore filling
- compacted laterite filling
- foundation to struct. engineer's detail

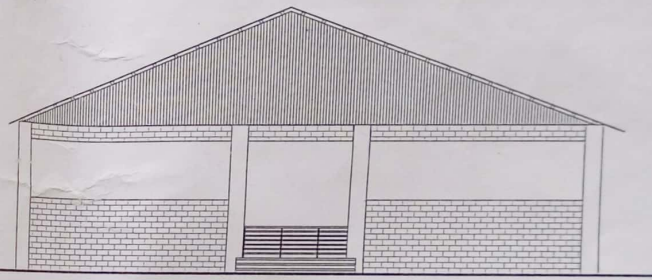

TYPICAL FRONT AND BACK ELEVATION

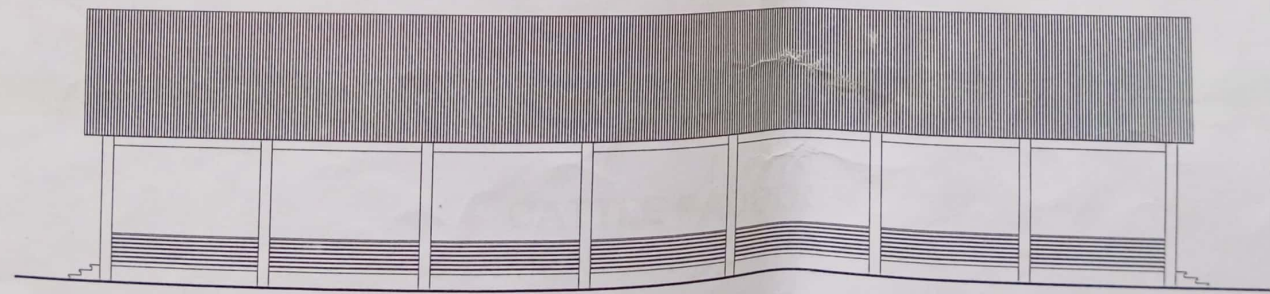

TYPICAL SIDE ELEVATION



HOUSE
CATTLE PADDOCK
3 DIMENSIONAL DRAWING